

Surface distribution metal cabinet of 198 modules.

Surface distribution metal cabinet of 198 modules.6 rows x 33 modules. IP30 IK09. White colour. Sheet metal 1 mm. External dimensions 694 x 1052 x 155 mm. With 35 mm DIN rail. Class I. Reversible door. Removable chassis. Earth and neutral terminals included.



Features

Enclosure type	Distribution
Installation method	Surface
Use	Domestic / Tertiary
Location type	Inside
No. Modules (18 mm)	198
Modules per row	33
Removable frame	Yes
Metallic DIN profile	Yes
Dimensions outside (mm) (width x height x depth)	694 x 1052 x 155
Case material	Metallic
Frame and door material	Metallic
Case color	White
Cap color	White
Door color	White
Door opening	Horizontal
Battens included	Yes (Screw terminals)
Strip type	Neutral + Ground
No. of terminals and size	TT (2x25 mm2 + 78x16 mm2) + N (2x25 mm2 + 38x16 mm2)
Ticket type	Unfathomable
Fixation System (For surface)	Inside

Sealable	Not
Lid closure system	1/4 turn screw without spring
Door closing system	Handle
Reversible door	Yes
Possibility of mounting strips	Yes (included)
Possibility of putting lock	Key
Separate covers or doors on the boxes	Yes
Possibility of mounting DIN rail	Yes (included)
Common applications	Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)


Technical data

Protection Degree (IP)	IP30
Protection Degree (IK)	IK09
Impact shock resistance	Medium
Insulation class	Class I
Fire resistance (GWEPT)	650 °C
Ambient operating temperature	-5 °C ; +60 °C
Work stress	<1000 Vac ; 1500 Vdc
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations	UNE-EN 62208: 2012
According to Regulations UNE/EN	UNE-EN 61439-1: 2021 UNE-EN 61439-3: 2012 UNE-EN 61439-4: 2013
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sketch

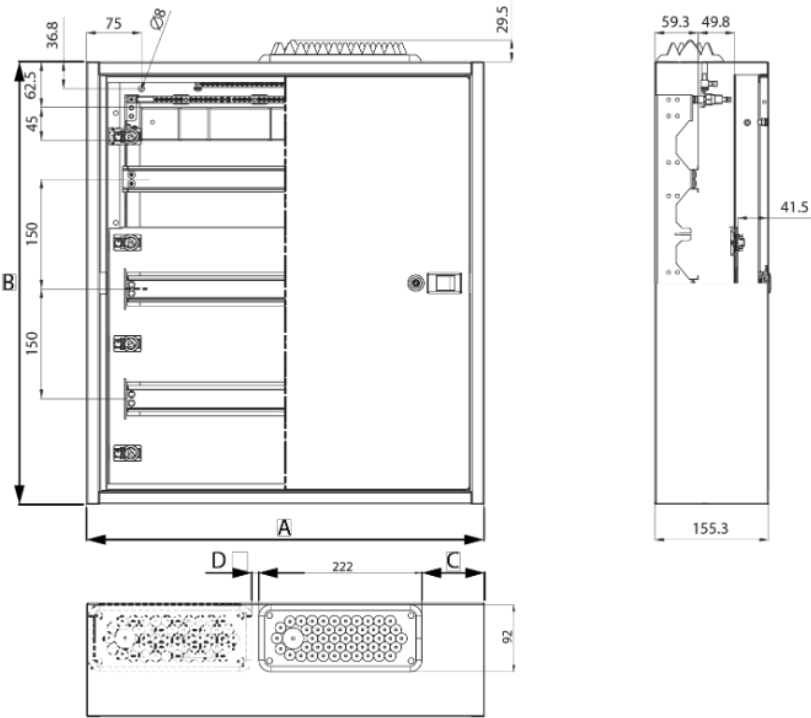

Sketch

	A	B	C	D
M3S72-1	542	605	85.5	-
M4S96-1	542	755	85.5	-
M5S120-1	542	905	85.5	-
M6S144-1	542	1 055	85.5	-
M4S132-1	704	755	1.0	10
M5S165-1	704	905	1.0	10
M6S198-1	704	1 055	1.0	10

