


- 11 Modules Sealed Distribution Boxes.
- For Locking Options please see Catalogue.
- For Accessories please see Catalogue.

References

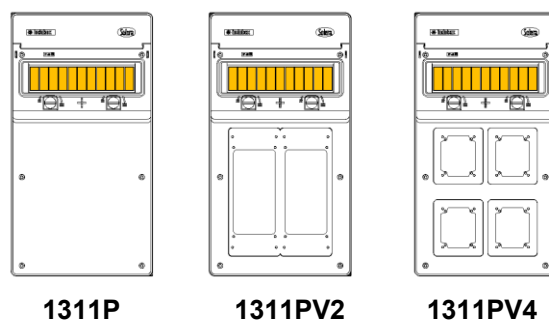

1311P

1311PV2

1311PV4

Specifications

- Directive 2014/35/UE
- In accordance with EN 62208 / EN 61439

Technical Sheet:

	N° TOTAL	Modules	PRE-CUTS											Windows, sockets..			
			EXTERNAL DIMENSIONS				Uper / Lower				Sides				CETAC	CETAC	Interlocked
			length	height	depth	up to Ø20	up to Ø25	up to Ø32	up to Ø40	up to Ø20	up to Ø25	up to Ø32	up to Ø40				
1311P	11		270	500	160	4	4		6				8				
1311PV2	11		270	500	160	4	4		6				8		2		
1311PV4	11		270	500	160	4	4		6				8	4			

- Ingress Protection IP65
- Resistance to impact IK08
- Fire Resistance (Glow Wire Test 650°C)
- Heat Resistance (Ball pressure test) 70°C
- Dimensional stability -25°C to +85°C
- Colour RAL 7035
- Halogen Free Material
- UV Resistant



ED02/July 2016