


- 32 Modules Sealed Distribution Boxes.
- For Locking Options please see Catalogue.
- For Accessories please see Catalogue.

References

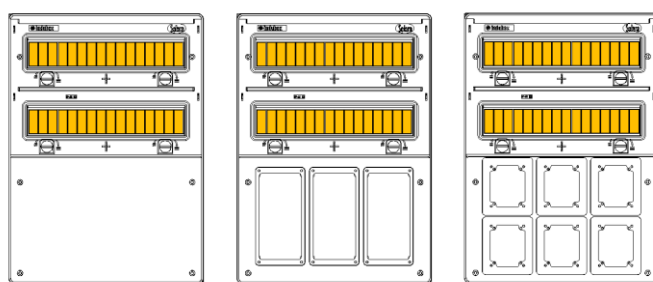

1332P

1332PV3

1332PV6

Specifications:

- Directive 2014/35/UE
- In accordance with EN 60670 / EN 61439

Technical Sheet:

	Modules N° TOTAL	EXTERNAL DIMENSIONS			PRE-CUTS								Windows, sockets...	
					Uper / Lower				Sides					
					length	heigh	depth	up to Ø20	up to Ø25	up to Ø32	up to Ø40	up to Ø20	up to Ø25	up to Ø32
1332P	32	362	500	160	4	4				6		8		
1332PV3	32	362	500	160	4	4				6		8		3
1332PV6	32	362	500	160	4	4				6		8	6	

- Ingress Protection IP65
- Resistance to impact IK08
- Fire Resistance (Glow Wire Test 650°C)
- Heat Resistance (Ball pressure test) 70°C
- Dimensional stability -25°C to +85°C
- Colour RAL 7035
- Halogen Free Material
- UV Resistant