


Flush mechanism box in hollow partition. For 1 module. Nylon ties fixing system.

Flush mechanism box in hollow partition. For 1 module. Nylon ties fixing system. Flush dimensions Ø 68 x 46 mm. 4 inputs for tube Ø 20 mm. 2 inputs for tube Ø 25 mm. Use cutter Ø 68 mm. Blue colour.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

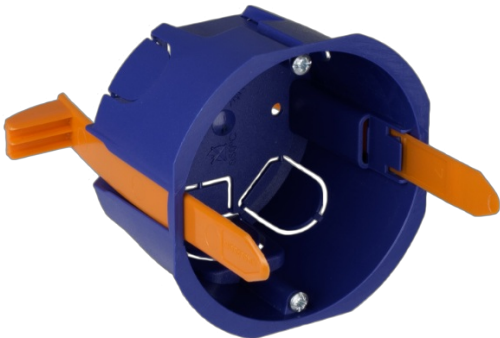

Features

Enclosure type	Mechanism box
Installation method	For dry wall
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	Ø 68x46
Case material	Insulation
Frame and door material	Insulation
Case color	Blue
Door opening	Horizontal
Battens included	No
Ticket type	Unfathomable
No. of inlets and size (mm)	4xØ20, 2xØ25
Linkable	Vertically and horizontally
Fixing system to the hollow partition.	Nylon flange
With grommets at the bottom to fix the tubes or cables with cable ties, quantity	Yes
With recessed hole marking system	Yes

Technical data

Fire resistance (GWT)	850°C
-----------------------	-------

Ambient operating temperature	-5°C ->+60°C
Work stress	400 Vca
Free of halogens	Yes

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-1; -22
According to REBT	Yes
AENOR certificate	Yes
CB certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability

According to European Directive 2011/65/UE (RoHS)	Not applicable
According to European Directive 2012/19/UE (RAEE2)	Not applicable
ECOEMBES	Yes