


Flush connection box. Ø 150 mm. Adjustable square cover, perimeter adjustment, with central screw.

Flush connection box. Ø 150 mm. Adjustable square cover, perimeter adjustment, with central screw. Depth 46 mm. 14 inputs for Ø 25 tube and 4 inputs for Ø 32 mm tube.
Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)

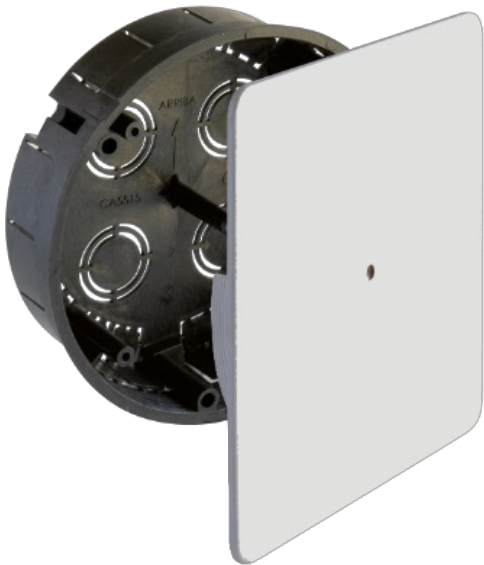

Features

Enclosure type	Connection and derivation
Installation method	Flush in work
Use	Domestic / Tertiary
Location type	Inside
Dimensions inside (mm) (Width x Height x Depth)	Ø 150x46
Case material	Insulation
Case color	Black
Cap color	White
No. of inlets and size (mm)	15 xØ 25 y 4 xØ 32
Lid closure system	Perimeter adjustment

Technical data

Impact shock resistance	Medium
Insulation class	Class II
Fire resistance (GWT)	650°C
Heat resistance (Ball pressure)	70°C
Work stress	400 Vca

Free of halogens	Yes
------------------	-----

Regulations

CE marking	Yes
UK marking	Yes
CMim marking	Yes
According to Regulations UNE/EN	UNE-EN 60670-22
According to REBT	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes

Sustainability